

# OZX205.A





## Product design features

- ✓ Maintenance free product (SMF)
- ✓ Power Supply & Starting power suitable
- ✓ More than 300 cycles at 75% D.O.D.
- ✓ More than 800 cycles IEC 61427
- ✓ High resistance to deep and repetitive discharge cycles
- ✓ Internal gas recombination efficiency 98% - 99%
- ✓ One-way valve regulated system with flame-arrestor
- ✓ Delivered ready for use at 100% of its nominal capacity
- ✓ Long Service Life

Mechanical Characteristics		
	SI Units	US Unit
Length	513 mm	20.1 inches
Width	223 mm	8.7 inches
Height	223 mm	8.7 inches
Approx. Weight	47,6 kg	

Electrical Characteristics	
Nominal voltage	12 Volts
Nominal Capacity (20H)	180 Ah
Nominal Capacity (100H)	205 Ah
Electrolyte density	1.290 ± 0.015 g/ml

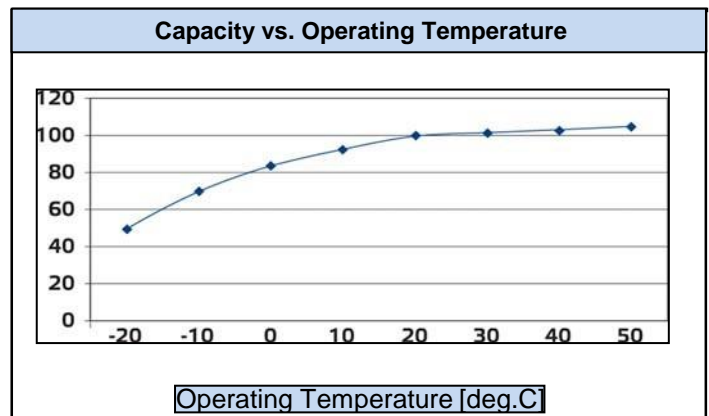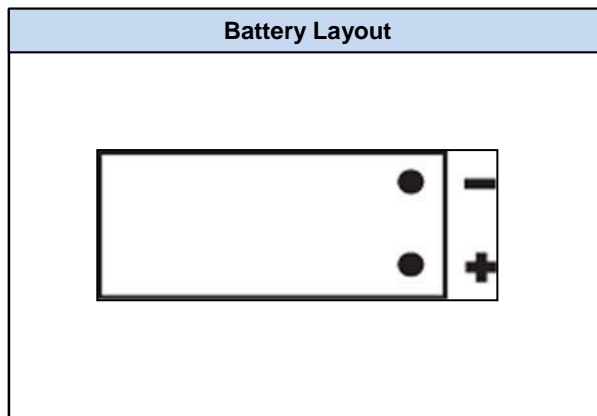

Other Specifications	
Terminals	Standard cone
Handles	Yes (2)
QTY/PLT/Layer	21/1/3