

# OZX125.0





## Product design features

- ✓ Maintenance free product (SMF)
- ✓ Power Supply & Starting power suitable
- ✓ More than 300 cycles at 75% D.O.D.
- ✓ More than 800 cycles IEC 61427
- ✓ High resistance to deep and repetitive discharge cycles
- ✓ Internal gas recombination efficiency 98% - 99%
- ✓ One-way valve regulated system with flame-arrestor
- ✓ Delivered ready for use at 100% of its nominal capacity
- ✓ Long Service Life

| Mechanical Characteristics |          |             |
|----------------------------|----------|-------------|
|                            | SI Units | US Unit     |
| Length                     | 345 mm   | 13.5 inches |
| Width                      | 175 mm   | 6.8 inches  |
| Height                     | 230 mm   | 9.05 inches |
| Approx. Weight             | 27.1 kg  |             |

| Electrical Characteristics |                    |
|----------------------------|--------------------|
| Nominal voltage            | 12 Volts           |
| Nominal Capacity (20H)     | 110 Ah             |
| Nominal Capacity (100H)    | 125 Ah             |
| Electrolyte density        | 1.290 ± 0.015 g/ml |

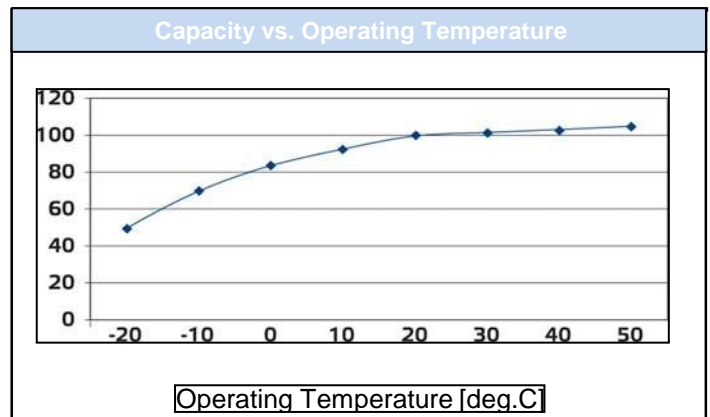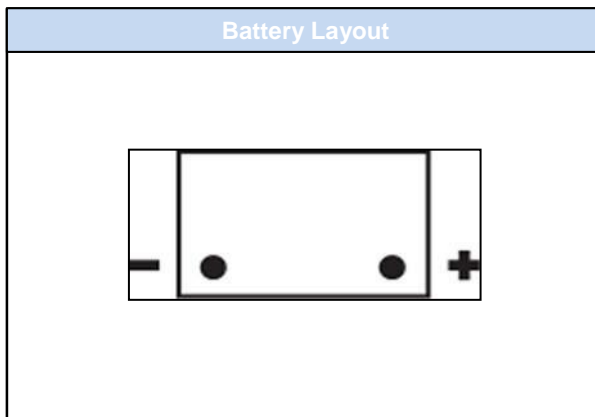

| Other Specifications |               |
|----------------------|---------------|
| Terminals            | Standard cone |
| Handles              | Yes (2)       |
| QTY/PLT/Layer        | 48/1/4        |