

12V | 1000A

GB40



# START DEAD BATTERIES. ULTRASAFE® LITHIUM JUMP STARTER.™

## GAS & DIESEL

### UP TO 6.0L GAS & 3.0L DIESEL.

Designed for gas engines up to 6 Liters and diesel engines up to 3 Liters for cars, boats, lawn mowers and more.

## USB

### CHARGE & RECHARGE.

It's internal battery can be used to recharge any personal mobile devices like smartphones, tablets, or any other USB device, and can be recharged by any powered USB port.

## 20X

### UP TO 20 JUMPSTARTS.

Compact, yet powerful lithium jump starter rated at 1,000 Amps. Full power to jump start a vehicle up to 20 times on a single charge.

## ULTRA SAFE

### SPARK PROOF TECHNOLOGY.

Safely connect to any 12-volt car battery with our mistake-proof design featuring spark-proof technology and reverse polarity protection.



NOCO

30339 Diamond Parkway, #102  
Glenwillow, OH 44139 | USA  
1.800.456.6626

no.co



AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN

GB40

NOCO BOOST PLUS™

12V 1000A

## INTERFACE

## POWER LED

The jump starter is in standby or the battery voltage is too low for the jump starter to detect.



## POWER BUTTON

Push to turn unit "On" & "Off".



## CHARGE LED

Indicates the charge level of the internal battery.



## BOOST LED

Illuminates white when boost is active. The LED flashes white when manual override feature is active.



## LIGHT MODE BUTTON

Toggles the ultra-bright LED light through 7 light modes: 100% > 50% > 10% > SOS > Blink > Strobe > Off



## ERROR

Illuminates Red if reverse polarity is detected. Blinks "on" and "off" in various sequences to convey error conditions.




## MANUAL OVERRIDE.


Press and hold the manual override button for 3 seconds, until the Boost LED starts flashing, to enter into manual mode.



## WHAT'S IN THE BOX

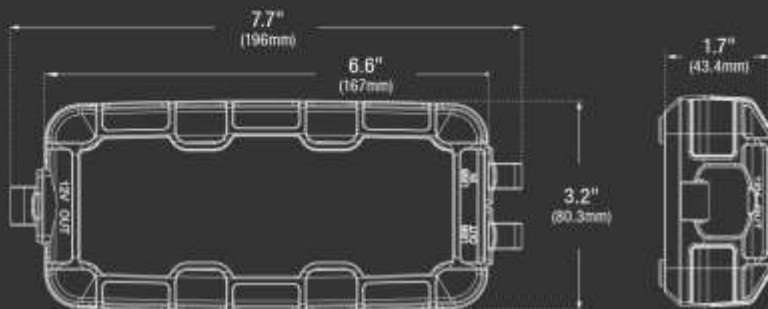

\*Accessories not to scale with GB40

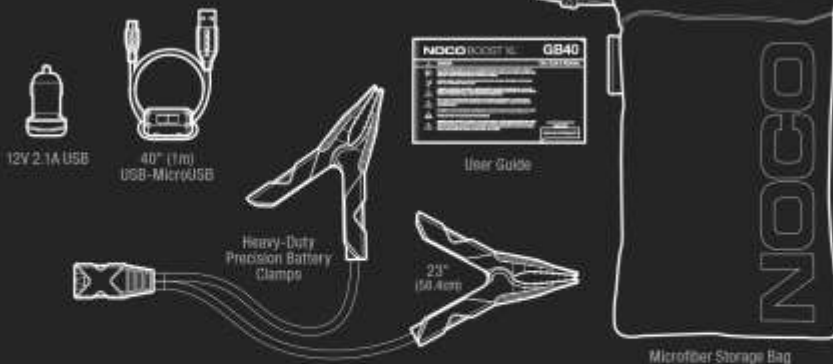

## CHARGE DEVICES.

Recharge your personal devices on the go, like smartphones, tablets, e-readers and more - up to 4 smartphone recharges.

## RECHARGE TIME

0.5A	12hr
1A	6hr
2A	3hr

## TECHNICAL SPECIFICATIONS

INTERNAL BATTERY:	24 Watt-Hour Lithium Ion
PEAK CURRENT RATING:	1000A
OPERATING TEMPERATURE:	-4°F to +122°F (-20°C to +50°C)
CHARGING TEMPERATURE:	32°F to +104°F (0°C to +40°C)
MICRO USB (INPUT):	5V, 2.1A
USB (OUTPUT):	5V, 2.1A
HOUSING PROTECTION:	IP65 (w/Ports Closed)
COOLING:	Natural Convection
UNIT WEIGHT:	1.65 lbs (0.74kg)
UNIT WEIGHT W/ CLAMPS & ACCESSORIES:	2.4 lbs (1.09kg)
LED FLASHLIGHT:	100 Lumens
VOLUMETRICS:	<p><b>Retail Packaging:</b>            Dimensions: 3.62" x 4.57" x 8.27"            Weight: 2.75lbs            UPC: 0-46221-15002-5</p> <p><b>Master Carton:</b>            Dimensions: 9.25" x 12.60" x 11.22"            Weight: 18.30lbs            Quantity: 6            UCC: 10046221150022</p> <p><b>Inner Carton:</b>            Dimensions: 4.01" x 6.78" x 5.12"            Weight: 2.89lbs</p> <p><b>Units Per Pallet:</b>            NA - 360 Units            EU - 270 Units</p>

NOCO

30339 Diamond Parkway, #102  
 Genwillow, OH 44130 | USA  
 1.800.456.6626

no.co

