


# OZX165.S


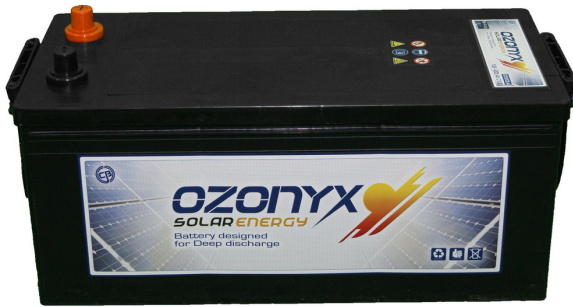


## Product design features

- ✓ Power Supply & Starting power suitable
- ✓ Battery type: Solar, Monoblock Traction.
- ✓ Without maintenance.
- ✓ Reinforced separation plate between cells.
- ✓ Vibration and shock proof anchored plates.
- ✓ Low self discharge.
- ✓ Low float current.
- ✓ Lead-acid battery terminals.
- ✓ Manufactured in accordance with ISO 9002 certification and complying with CE regulations.
- ✓ Container made of fire resistant ABS material.

Mechanical Characteristics		
	SI Units	US Unit
Length	513 mm	20.1 inches
Width	190 mm	7.5 inches
Height	223 mm	8.7 inches
Approx. Weight	36 kg	

Electrical Characteristics	
Nominal voltage	12 Volts
Nominal Capacity (20H)	140 Ah
Nominal Capacity (100H)	165 Ah
Electrolyte density	1.290 ± 0.015 g/ml

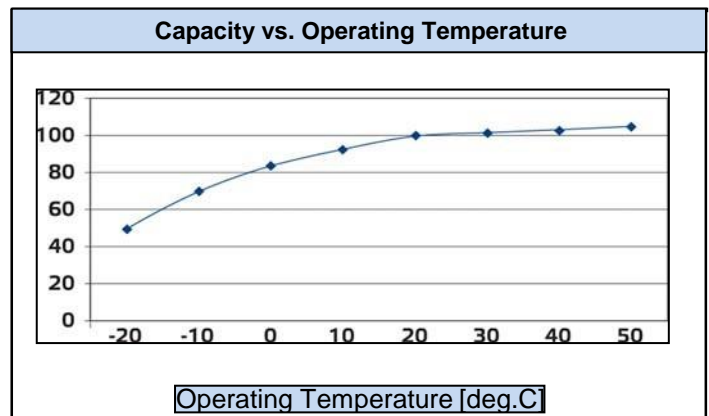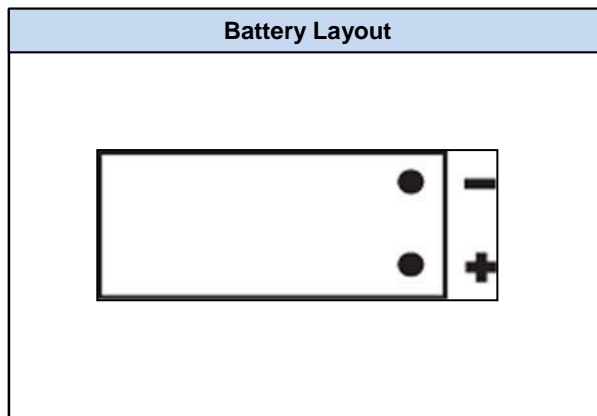

Other Specifications	
Terminals	Standard cone
Handles	Yes (2)
QTY/PLT/Layer	21/1/3