


### Product design features:

- Sealed, AGM-technology
- Balanced cyclic life and float life performance
- Wide range of operating temperature
- One-way valve regulated system with flame-arrestor
- Internal gas recombination efficiency 98% - 99%
- Easy for installation, maintenance free product
- Delivered ready for use at 100% of its nominal capacity
- Non-hazardous cargo for ground, sea and air transport
- Fully recyclable product


Mechanical Characteristics		
	SI Units	US Units
<b>Length</b>	513 mm	20.19 inches
<b>Width</b>	223 mm	8.78 inches
<b>Height</b>	223 mm	8.78 inches
<b>Approx. weight</b>	48.0 kg	105.82 lbs

Electrical Characteristics	
<b>Nominal voltage</b>	12 Volts
<b>Nominal Capacity (100H)</b>	205 Ah
<b>CCA Performance (-18 deg.C)</b>	1250 A [EN]
<b>Electrolyte density</b>	1.280 ± 0.015 g/ml

**Battery Layout**

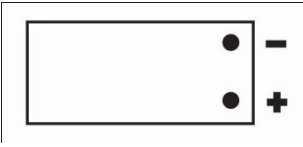


**Base Holddown**



**Other Specifications**

<b>Terminals</b>	Standard cone
<b>Case color</b>	Black
<b>Lid color</b>	Black
<b>Handles</b>	Yes (2)
<b>QTY/PLT/Layer</b>	18 / 1 / 3

### 25A and 20 hour discharge characteristics

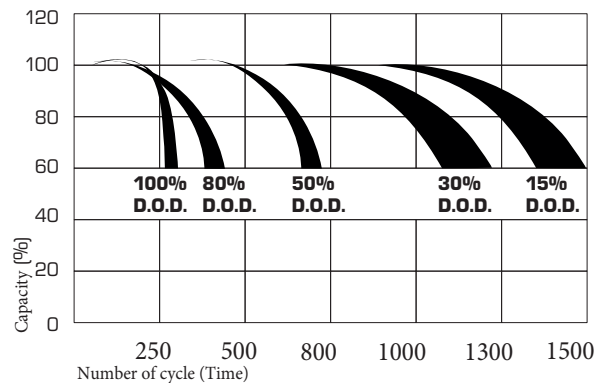

Loading Voltage vs Discharge Time

**Certificates: ISO 9001:2008, ISO 14001:2004,  
OHSAS 18001:2007, NATO AQAP 2110**