

SHEET

MOTIVE J305-AES



MODEL **J305-AES**
 VOLTAGE **6**
 CAPACITY **279Ah @ 20Hr**
 MATERIAL **Polypropylene**
 BATTERY **VRLA AGM / Non-Spillable / Maintenance-Free**
 COLOR **Maroon**



WATERING **No Watering Required**

6 VOLT

PHYSICAL SPECIFICATIONS

BCI	MODEL NAME	TERMINAL TYPE	DIMENSIONS ° INCHES (mm)			WEIGHT † LBS. (kg)	HANDLES	INSTALLATION ORIENTATION
			LENGTH	WIDTH	HEIGHT †			
902	J305-AES	M8/DT/LT	11.66 (296)	6.94 (176)	14.09 (358)	101 (45)	Braided Rope	Horizontal and Vertical

ELECTRICAL SPECIFICATIONS

CHARGER VOLTAGE SETTINGS (AT 77°F/25°C)

SYSTEM VOLTAGE	6V	12V	24V	36V	48V
Maximum Charge Current (A)	50% of C ₂₀				
Absorption Voltage (2.40 V/cell)	7.20	14.40	28.80	43.20	57.60
Float Voltage (2.25 V/cell)	6.75	13.50	27.00	40.50	54.00

Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.

ADD	SUBTRACT
0.005 volt per cell for every 1°C below 25°C 0.0028 volt per cell for every 1°F below 77°F	0.005 volt per cell for every 1°C above 25°C 0.0028 volt per cell for every 1°F above 77°F

VOLTAGE	CRANKING PERFORMANCE		CAPACITY ^A MINUTES		CAPACITY ^B AMP-HOURS (Ah)				ENERGY (kWh)	INTERNAL RESISTANCE (mΩ)	SHORT CIRCUIT CURRENT (amps)
	C.C.A. ^D @0°F	C.A. ^E @32°F	@ 25 Amps	@ 75 Amps	5-Hr	10-Hr	20-Hr	100-Hr			
6	-	-	597	161	228	249	279	320	1.92	1.7	3600

CHARGING INSTRUCTIONS



CHARGING TEMPERATURE COMPENSATION

OPERATIONAL DATA


RECYCLE RESPONSIBLY STATE OF CHARGE MEASURE OF OPEN-CIRCUIT VOLTAGE

OPERATING TEMPERATURE	SELF DISCHARGE
-40°F to 140°F (-40°C to +60°C). At temperatures below 32°F (0°C) maintain a state of charge greater than 60%..	Less than 3% per month depending on storage temperature conditions

99% RECYCLABLE		6V AGM	PERCENTAGE CHARGE	CELL	6 VOLT
			100	2.14	6.42
		75	2.09	6.27	
		50	2.04	6.12	
		25	1.99	5.97	
		0	1.94	5.82	

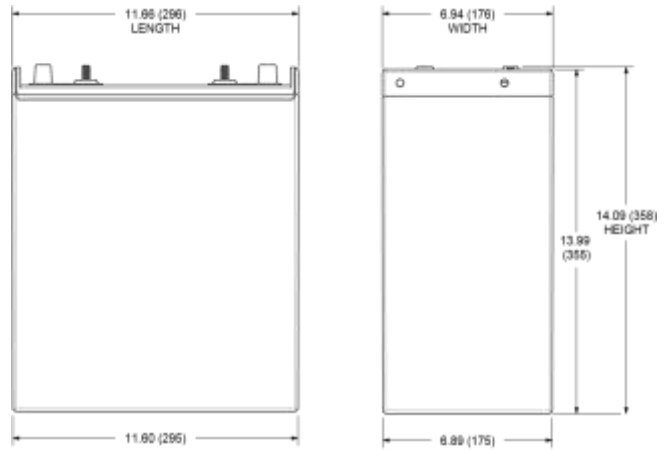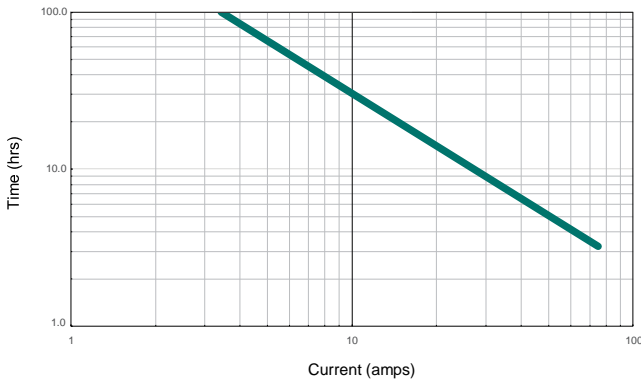

BATTERY DIMENSIONS (shown with DT)



TERMINAL TYPE^G

15	M8	M8
	Battery Height with Terminal in Inches (mm) 13.65 (347) Torque Values in-lb (Nm) Bolt: 85 – 90 (10 – 11)	
15	M8	M8 WITH LT ADAPTER (ADAPTER PROVIDED BUT NOT INSTALLED)



Designed in compliance with applicable BCI, DIN, BS and IEC standards. Tested in compliance to BCI and IEC standards.



800.423.6569 / +1.562.236.3000 / trojanbattery.com



Battery Height with Terminal in Inches (mm) 15.15 (385)

Torque Values in-lb (Nm)


Connection to M8: 85 – 90 (10-11)

Connection to LT: 65 – 75 (7.5 – 8.5)

Bolt Size M8


x 1.25


- A. The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- B. The amount of amp-hours (Ah) a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- C. D imensions may vary depending on type of handle or terminal. Batteries should be mounted with 0.5 inches (12.7 mm) spacing minimum.
- D. C.C.A. (Cold Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 0°F (-18°C) at a voltage above 1.2 V/cell.

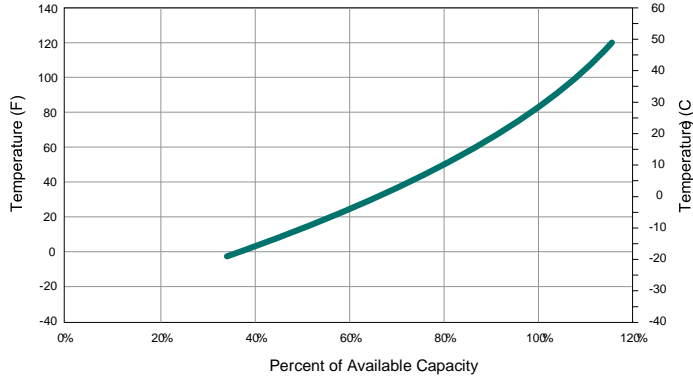

- E. C.A. (Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 32°F (0°C) at a voltage above 1.2 V/cell. This is sometimes referred to as marine cranking amps @ 32°F or M.C.A. @ 32°F.
- F. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- G. Terminal images are representative only.
- H. Batteries in storage should be charged when they decline to 75% State of Charge (SOC).
- I. Weight may vary.

SELF DISCHARGE VS. TIME^H

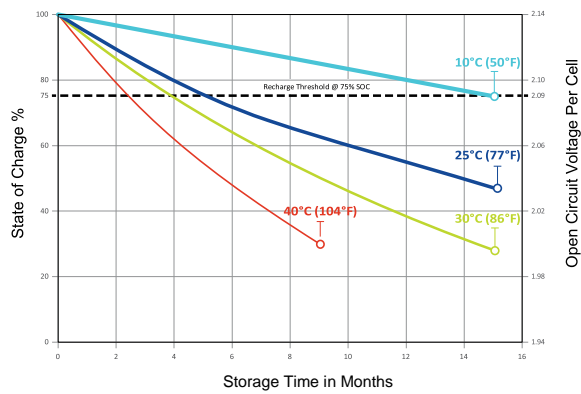

6	DT	AUTOMOTIVE POST & STUD
	Battery Height with Terminal in Inches (mm) 14.09 (358)	
	Torque Values in-lb (Nm)	
	Connected to Stud: 95 – 105 (11 – 12)	
	Connected to AP: 50 – 70 (6 – 8)	
	Bolt Size	
	5/16"	